




单向硅整流桥堆
反向电压 600 V
正向电流 25 A

Single Phase Silicon Bridge Rectifiers
Reverse Voltage 600 V
Forward Current 25 A

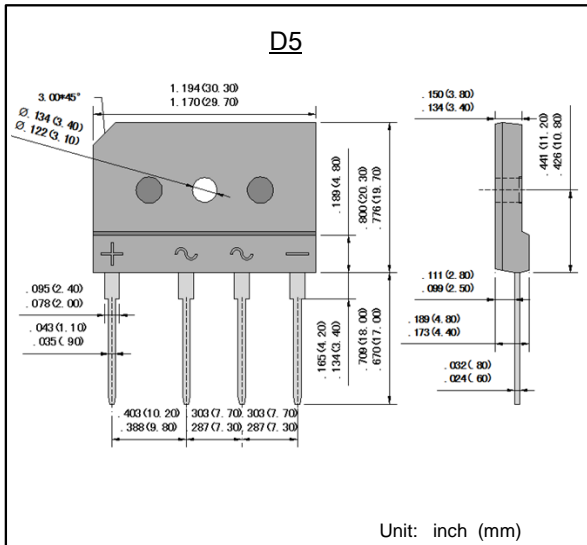

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向压降低 Low forward voltage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 玻璃钝化芯片 Glass passivated chip
- 引线 and 管体皆符合RoHS标准
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品
Green compound with suffix "-F" on Marking

机械数据 Mechanical Data

- 封装外形:D5 塑封 Case:D5 Molded plastic
- 环氧树脂: UL易燃等级: 94V-0
Epoxy: UL 94V-0 rate flame retardant
- 引脚: 镀锡,无铅 Lead: Pure tin plated, lead free
- 安装位置: 任意 Mounting Position: Any
- 安装扭矩: 推荐值 0.5牛*米 Mounting torque : Recommend 0.5 N*m

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| 参数 Parameter | 符号 Symbols | D25SB60L | 单位 Unit |
|---|-----------------|--------------|------------------|
| 最大可重复峰值反向电压 Maximum repetitive peak reverse voltage | V_{RRM} | 600 | V |
| 最大均方根电压 Maximum RMS voltage | V_{RMS} | 420 | V |
| 最大直流阻断电压 Maximum DC blocking voltage | V_{DC} | 600 | V |
| 最大正向平均整流电流 Maximum average forward rectified current | $I_{F(AV)}$ | 25 | A |
| 正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms single half sine-wave | I_{FSM} | 450 | A |
| 引线和管壳间绝缘强度 Dielectric strength Terminals to case | V_{dis} | 2500 | V |
| 熔断系数 $t \leq 8.3$ ms Current squared time $t \leq 8.3$ ms | i^2t | 508 | A ² S |
| 典型热阻 Typical thermal resistance (Note 1、2) | $R_{\theta JA}$ | 22 | °C/W |
| | $R_{\theta JC}$ | 1 | |
| 工作结温和存储温度 Operating junction and storage temperature range | T_J, T_{STG} | -55 --- +150 | °C |

备注 Note:

- 1) 安装在PCB板上, 从PN结到周围环境的热阻。
1) Thermal resistance from junction to ambient, PCB mounted.
- 2) 安装在PCB板上, 从PN结到管体的热阻。
2) Thermal resistance from junction to case, PCB mounted.

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


| 参数 Parameter | 符号 Symbols | D25SB60L | 单位 Unit |
|---|---------------|----------|------------|
| 最大正向电压 @ $I_F=12.5A$ Maximum forward voltage | V_F | 0.95 | V |
| 最大反向电流 @ V_{DC} TA= 25°C Maximum reverse current | I_R | 5 | μA |



特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

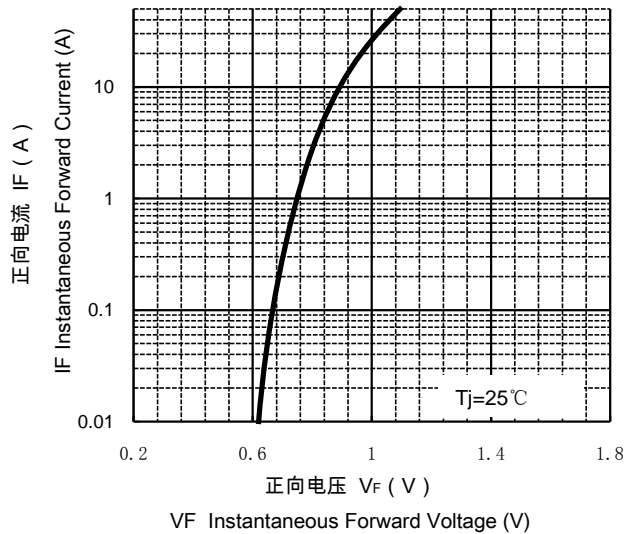


正向电流降额曲线

FORWARD CURRENT DERATING CURVE

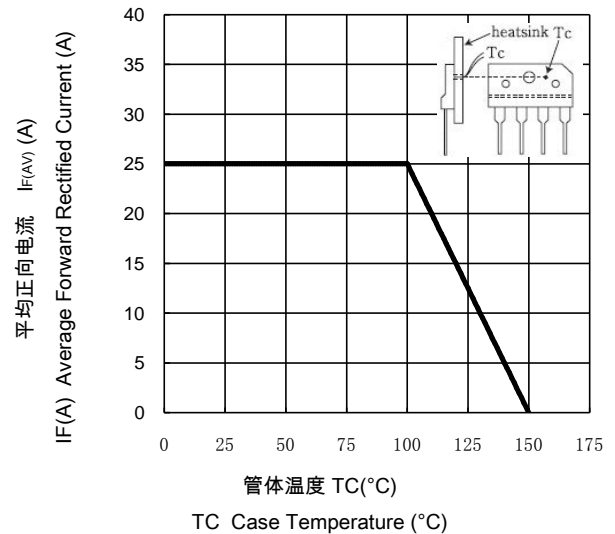

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

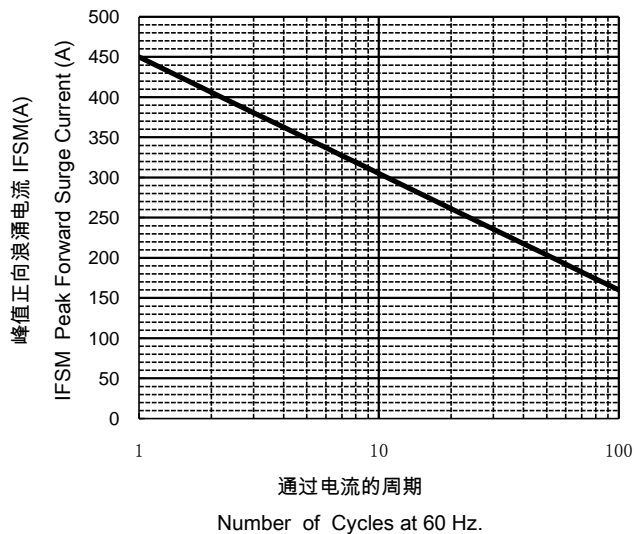

反向特性曲线

Typical Reverse Characteristics

