




表面安装超快速整流二极管  
 反向电压 50 ~ 600 V  
 正向电流 1.0 A

Surface Mount Super Fast Recovery Rectifiers  
 Reverse Voltage 50 ~ 600 V  
 Forward Current 1.0 A

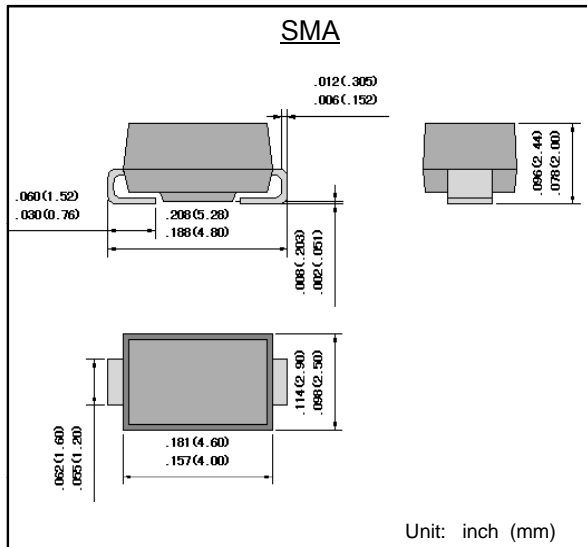

### 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
 260°C/10 秒  
 260°C/10seconds
- 引线 and 管体皆符合RoHS标准  
 Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
 Green compound with suffix "-F" on Marking

### 机械数据 Mechanical Data

- 封装外形:SMA 塑封 Case:SMA Molded plastic
- 环氧树脂: UL易燃等级: 94V-0  
 Epoxy: UL 94V-0 rate flame retardant
- 引脚: 镀锡,无铅 Lead: Pure tin plated, lead free

### 最大值和特性 TA = 25°C 除非另有规定。

### Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	1.0							A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	30							A
最大正向电压 @ $I_F=1.0A$ Maximum forward voltage	$V_F$	0.95			1.30		1.70		V
最大反向电流 @ $V_{DC}$ TA=25°C Maximum reverse current	$I_R$	5							μA
最大反向恢复时间 $I_F=0.5A$ , $I_R=1.0A$ , $I_{RR}=0.25A$ MAX. reverse recovery time	$T_{rr}$	35							ns
典型热阻 Typical thermal resistance (Note 1)	$R_{\theta JA}$	125							°C/W
工作结温和存储温度 Operating junction and storage temperature rang	$T_j, T_{STG}$	-55 --- +150							°C

备注 Note:


- 1) 安装在PCB板上, 从PN结到周围环境的热阻。
- 1) Thermal resistance from junction to ambient, PCB mounted.



## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

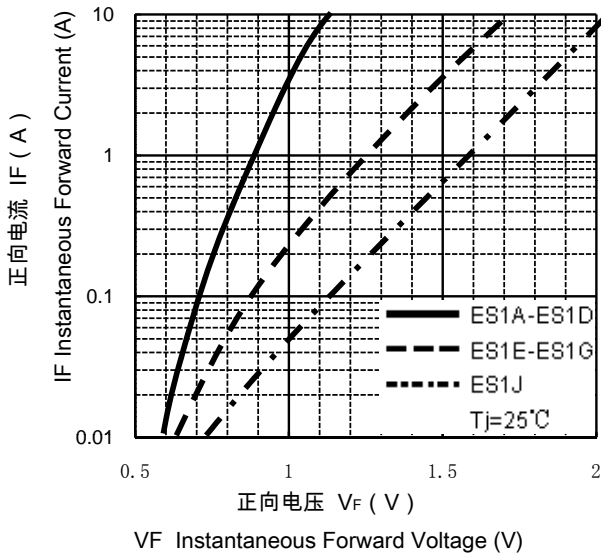


正向电流降额曲线

FORWARD CURRENT DERATING CURVE

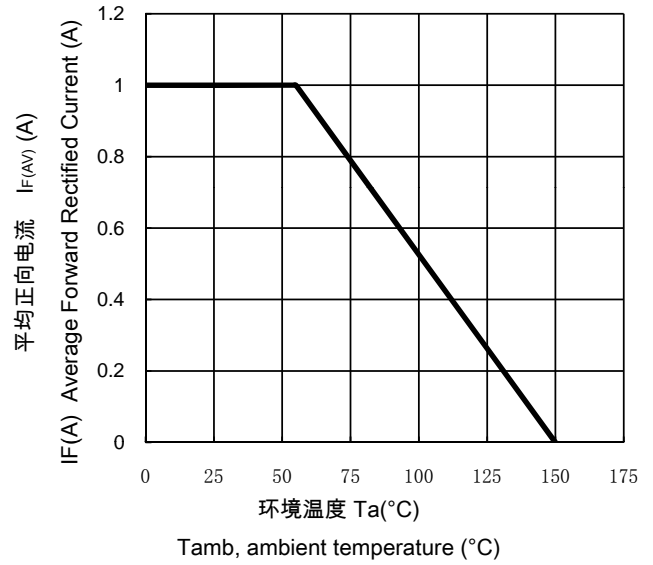

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

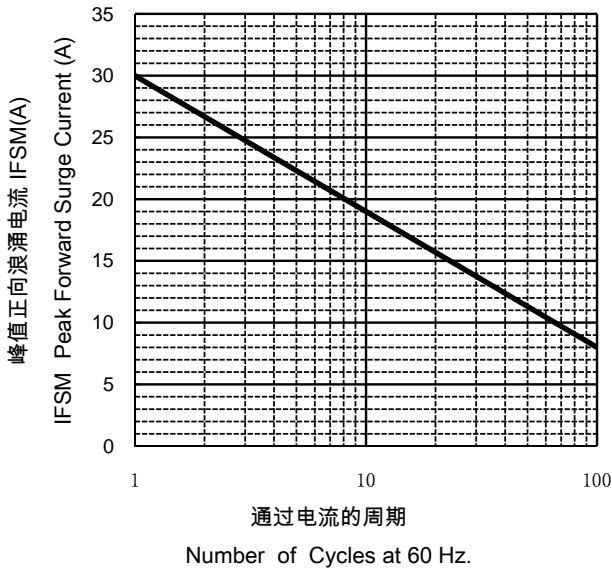

反向特性曲线

Typical Reverse Characteristics

