



MUR220G-MUR260G

塑封高效率整流二极管


反向电压 200 ~ 600 V

正向电流 2.0 A

Plastic High-Efficiency Recover Rectifier

Reverse Voltage 200 ~ 600V

Forward Current 2.0 A

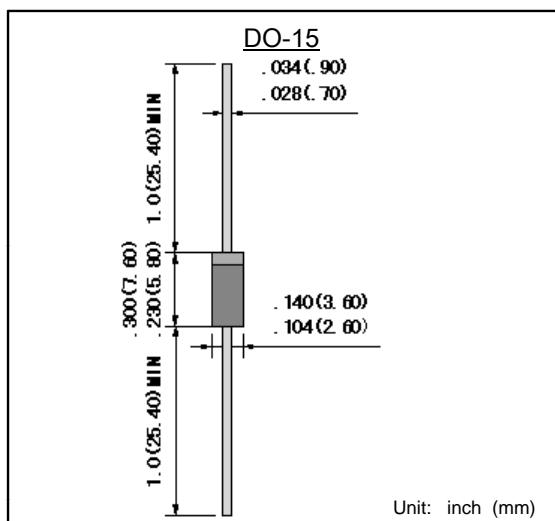

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒, 引线长度:0.375" (9.5mm)
260°C/10seconds, 9.5mm lead length
- 引线和管体皆符合RoHS标准
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品
Green compound with suffix "-F" on Marking

机械数据 Mechanical Data

- 封装外形:DO-15 塑封 Case:DO-15 Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR220G	MUR230G	MUR240G	MUR260G	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	2.0				A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I _{FSM}	50				A
典型热阻 Typical thermal resistance (Note 1)	R _{θJA}	60				°C/W
工作结温 Operating junction temperature range	T _j	-55 --- +150				°C
存储温度 Storage temperature range	T _{STG}	-55 --- +150				°C

备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	MUR220G	MUR230G	MUR240G	MUR260G	单位 Unit
最大正向电压 @IF=2.0A Maximum forward voltage	V _F	0.95	1.30	1.35	1.35	V
最大反向电流 @V _{DC} TA= 25°C Maximum reverse current	I _R	5				μA
最大反向恢复时间 IF=0.5A , IR=1.0A , IRR=0.25A MAX. reverse recovery time	T _{rr}	25	50			ns



特性曲线 Characteristic Curves

