



## 塑封超快恢复整流二极管


反向电压 50 ~ 600 V

正向电流 1.0 A

## Plastic Super Fast Recovery Rectifiers

Reverse Voltage 50 ~ 600 V

Forward Current 1.0 A

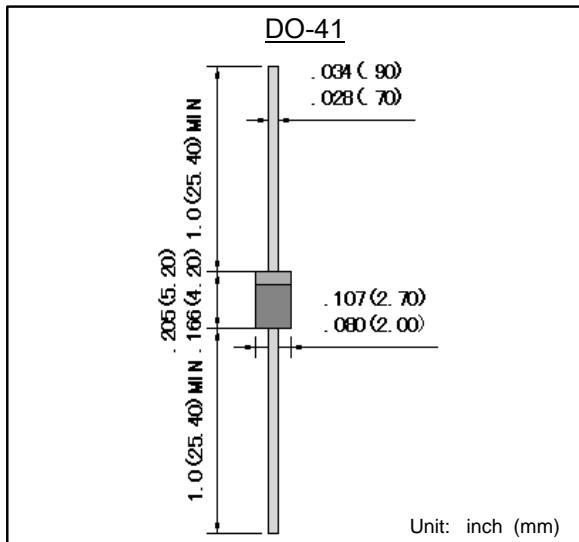

## 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)  
260°C/10seconds, 9.5mm lead length
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

## 机械数据 Mechanical Data

- 封装外形:DO-41 塑封 Case:DO-41 Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

最大值和特性 TA = 25°C 除非另有规定。

## Maximum Ratings &amp; Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	SF11G	SF12G	SF13G	SF14G	SF15G	SF16 G	SF18G	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$					1.0			A
正向不重复浪涌电流 8.3 ms 单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	$I_{FSM}$					30			A
最大正向电压 @IF=1.0A Maximum forward voltage	$V_F$			0.95		1.25	1.70		V
最大反向电流 @ $V_{DC}$ TA= 25°C Maximum reverse current	$I_R$				5				$\mu$ A
最大反向恢复时间 IF=0.5A , IR=1.0A , IRR=0.25A MAX. reverse recovery time	Trr				35				ns
典型热阻 Typical thermal resistance (Note 1)	R <sub>θJA</sub>				65				°C/W
工作结温和存储温度 Operating junction and storage temperature rang	T <sub>j</sub> , T <sub>STG</sub>				-55 --- +150				°C

备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.



## 特性曲线 Characteristic Curves

