




表面贴装稳压二极管
 功率 1000 mW
 稳压电压范围 3.0 - 220 V

Surface Mounted Zener Diode
 Power Dissipation 1000 mW
 Zener Voltage Range 3.0 - 220 V

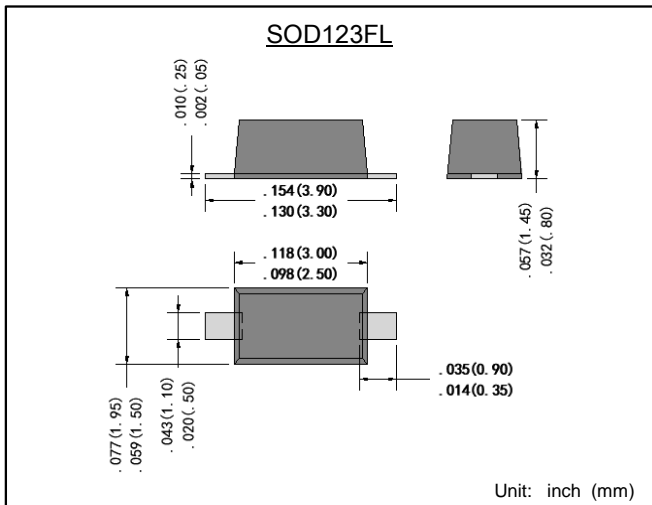

特征 Features

- 平面结构芯片 Planar die construction
- 最大功率耗散1000mW。 Maximum power dissipation of 1000 mW
- 超小表面贴装器件 Ultra-small surface mount device
- 适合自动装配 Ideally suited for automated assembly processes
- 引线镀层和管体符合RoHS标准
Lead plating and body according with RoHS standard

机械数据 Mechanical Data

- 封装: SOD123FL 塑料封装 Case: SOD123FL Molded plastic
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	数值	单位
		Value	Unit
功率消耗 Power Dissipation (Note 1)	P_D	1000	mW
正向电压 Forward Voltage IF=200mA	V_{FM}	1.2	V
工作结温和存储温度 Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 --- +150	°C

备注 Note:

- 1) Valid Provided that Device Terminals are Kept at Ambient Temperature.



SMF4727A-SZF1220A

产品型号 Part No.	印字 (代码)	$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	I_R		I_{ZM}
		Nom.(V)	Min.(V)	Max.(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max.(uA)	@VR(V)	(mA)
SMF4727A	27A	3.0	2.85	3.15	80.0	15	400	1.00	100.0	1.0	301.0
SMF4728A	28A	3.3	3.14	3.47	76.0	10	400	1.00	100.0	1.0	274.0
SMF4729A	29A	3.6	3.42	3.78	69.0	10	400	1.00	100.0	1.0	251.0
SMF4730A	30A	3.9	3.71	4.10	64.0	9	400	1.00	50.0	1.0	232.0
SMF4731A	31A	4.3	4.09	4.52	58.0	9	400	1.00	10.0	1.0	210.0
SMF4732A	32A	4.7	4.47	4.94	53.0	8	500	1.00	10.0	1.0	192.0
SMF4733A	33A	5.1	4.85	5.36	49.0	7	550	1.00	10.0	1.0	177.0
SMF4734A	34A	5.6	5.32	5.88	45.0	5	600	1.00	10.0	2.0	161.0
SMF4735A	35A	6.2	5.89	6.51	41.0	2	700	1.00	10.0	3.0	146.0
SMF4736A	36A	6.8	6.46	7.14	37.0	4	700	1.00	10.0	4.0	133.0
SMF4737A	37A	7.5	7.13	7.88	34.0	4	700	0.50	10.0	5.0	121.0
SMF4738A	38A	8.2	7.79	8.61	31.0	5	700	0.50	10.0	6.0	110.0
SMF4739A	39A	9.1	8.65	9.56	28.0	5	700	0.50	10.0	7.0	100.0
SMF4740A	40A	10.0	9.50	10.50	25.0	7	700	0.25	10.0	7.6	91.0
SMF4741A	41A	11.0	10.45	11.55	23.0	8	700	0.25	0.5	8.4	83.0
SMF4742A	42A	12.0	11.40	12.60	21.0	9	700	0.25	0.5	9.1	76.0
SMF4743A	43A	13.0	12.35	13.65	19.0	10	700	0.25	0.5	9.9	69.0
SMF4744A	44A	15.0	14.25	15.75	17.0	14	700	0.25	0.5	11.4	61.0
SMF4745A	45A	16.0	15.20	16.80	15.5	16	700	0.25	0.5	12.2	57.0
SMF4746A	46A	18.0	17.10	18.90	14.0	20	750	0.25	0.5	13.7	50.0
SMF4747A	47A	20.0	19.00	21.00	12.5	22	750	0.25	0.5	15.2	45.0
SMF4748A	48A	22.0	20.90	23.10	11.5	23	750	0.25	0.5	16.7	41.0
SMF4749A	49A	24.0	22.80	25.20	10.5	25	750	0.25	0.5	18.2	38.0
SMF4750A	50A	27.0	25.65	28.35	9.5	35	750	0.25	0.5	20.6	34.0
SMF4751A	51A	30.0	28.50	31.50	8.5	40	1000	0.25	0.5	22.8	30.0
SMF4752A	52A	33.0	31.35	34.65	7.5	45	1000	0.25	0.5	25.1	27.0
SMF4753A	53A	36.0	34.20	37.80	7.0	50	1000	0.25	0.5	27.4	25.0
SMF4754A	54A	39.0	37.05	40.95	6.5	60	1000	0.25	0.5	29.7	23.0
SMF4755A	55A	43.0	40.85	45.15	6.0	70	1500	0.25	0.5	32.7	22.0
SMF4756A	56A	47.0	44.65	49.35	5.5	80	1500	0.25	0.5	35.8	19.0
SMF4757A	57A	51.0	48.45	53.55	5.0	95	1500	0.25	0.5	38.8	18.0
SMF4758A	58A	56.0	53.20	58.80	4.5	110	2000	0.25	0.5	42.6	16.0
SMF4759A	59A	62.0	58.90	65.10	4.0	125	2000	0.25	0.5	47.1	14.0
SMF4760A	60A	68.0	64.60	71.40	3.7	150	2000	0.25	0.5	51.7	13.0
SMF4761A	61A	75.0	71.25	78.75	3.3	175	2000	0.25	0.5	56.0	12.0
SMF4762A	62A	82.0	77.90	86.10	3.0	200	3000	0.25	0.5	62.2	11.0
SMF4763A	63A	91.0	86.45	95.55	2.8	250	3000	0.25	0.5	69.2	10.0
SMF4764A	64A	100.0	95.00	105.00	2.5	350	3000	0.25	0.5	76.0	9.0
SZF1110A	11Z	110.0	104.50	115.50	2.3	450	4000	0.25	0.5	83.6	8.6
SZF1120A	12Z	120.0	114.00	126.00	2.0	550	4500	0.25	0.5	91.2	7.8
SZF1130A	13Z	130.0	123.50	136.50	1.9	700	5000	0.25	0.5	98.8	7.0
SZF1150A	15Z	150.0	142.50	157.50	1.7	1000	6000	0.25	0.5	114.0	6.4
SZF1160A	16Z	160.0	152.00	168.00	1.6	1100	6500	0.25	0.5	121.6	5.8
SZF1180A	18Z	180.0	171.00	189.00	1.4	1200	7000	0.25	0.5	136.8	5.2
SZF1200A	20Z	200.0	190.00	210.00	1.2	1900	9990	0.25	0.5	152.0	4.7
SZF1210A	21Z	210.0	199.50	220.50	1.0	2000	9990	0.25	0.5	160.0	4.0
SZF1220A	22Z	220.0	209.00	231.00	1.0	2000	9990	0.25	0.5	168.0	4.0