




2CL70A

## 塑封快恢复高压二极管

反向电压 6KV

正向电流 5mA

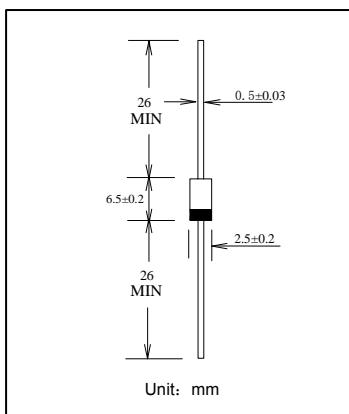

## Plastic Fast Recover High Voltage Rectifier

Reverse Voltage 6KV

Forward Current 5mA

特征 Features

- 超小型 Supersmall size
- 高可靠性 High reliability
- 高速开关 High speed switching
- RoHS对应产品 RoHS corresponding products

用途 Purpose

- 适用于办公设备的高压整流  
Rectification for office equipments of high voltage
- 其它高压电源整流用  
Rectification for Other high voltage power

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings &amp; Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL70A	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	6	KV
正向平均电流 Average Forward Current	I <sub>F(AV)</sub>	5 (正弦半波50HZ, 电阻负载Ta=25°C) (50HZ half-sine wave,Resistance load Ta=25°C)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	I <sub>FSM</sub>	0.5 (正弦半波50HZ, 1/2周期, Ta=25°C) (50HZ half-sine wave,1/2 cycle, Ta = 25 °C)	A
工作环境温度 Ambient Temperature	T <sub>tamb</sub>	-40 --- +100	°C
最高结温 Maximum Junction Temperature	T <sub>(vJ)</sub>	120	°C
贮存温度 Storage Temperature	T <sub>stg</sub>	-40 --- +120	°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL70A	单位 Unit
正向压降 Forward Voltage Drop	I <sub>F</sub> =10mA	V <sub>F</sub>	V
常温反向漏电流 Normal Temperature Reverse Current	VR=VRRM	I <sub>RM1</sub>	μA
高温反向漏电流 High Temperature Reverse Current	TA=100°C VR=VRRM	I <sub>RM2</sub>	μA
反向恢复时间 Reverse Recovery Time	I <sub>F</sub> =2mA,I <sub>RP</sub> =4mA 75% recovery	trr	nS



## 特性曲线 Characteristic Curves

