


塑封硅整流桥堆
反向电压 50 ---1000 V
正向电流 1.0 A

Single-phase Silicon Bridge Rectifier
Reverse Voltage 50 to 1000 V
Forward Current 1.0 A

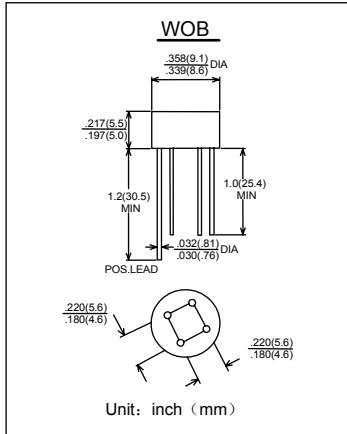

特征 Features

- 低的反向漏电流 Low reverse leakage
- 浪涌承受能力: 30 A Surge overload rating:30 Amperes peak
- 高温焊接保证 High temperature soldering guaranteed:
250°C/10 秒, 0.375" (9.5mm)引线长度。
250°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。 5 lbs. (2.3kg) tension

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 同于标记 Polarity: As marked
- 重量: 1.10 克 Weight: 1.10 Grams

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	1W 005M	1W 01M	1W 02M	1W 04M	1W 06M	1W 08M	1W 10M	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	1.0							A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	30							A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	I _{R(AV)}	30							µA
典型热阻 Typical thermal resistance	R _{θJA}	65							°C/W
工作结温和存储温度 Operating junction and storage temperature range	T _J , T _{STG}	-50 --- +150							°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	1W 005M	1W 01M	1W 02M	1W 04M	1W 06M	1W 08M	1W 10M	单位 Unit
最大正向电压 I _F = 1.0A Maximum forward voltage	V _F	1.0							V
最大反向电流 TA= 25°C Maximum reverse current TA=100°C	I _R	10 500							µA
典型结电容 V _R = 4.0V, f = 1MHz Type junction capacitance	C _j	15							pF

特性曲线 Characteristic Curves

