


塑封硅整流桥堆  
反向电压 200---800V  
正向电流 4.0 A

Single-phase Silicon Bridge Rectifier  
Reverse Voltage 200 to 800 V  
Forward Current 4.0A

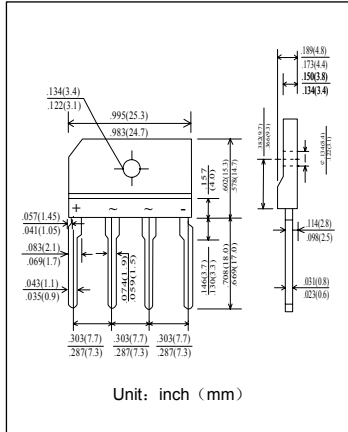

**特征 Features**

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 浪涌承受能力: 170 A Surge overload rating:170 Amperes peak

**机械数据 Mechanical Data**

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any
- 重量: 4.6 克 Weight:4.6 Grams

**极限值和温度特性** TA = 25°C 除非另有规定。

**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	D3SB20	D3SB40	D3SB60	D3SB80	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	140	280	420	560	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	4.0				A
加散热片 $T_c = 108^\circ C$ 无散热片 $T_a = 25^\circ C$	$I_{F(AV)}$	2.3				
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	120				A
最大反向峰值电流 @TA = 75°C Maximum peak reverse current full cycle	$I_{R(AV)}$	30				$\mu A$
典型热阻 Typical thermal resistance	$R_{\theta JA}$	6				$^\circ C/W$
工作结温和存储温度 Operating junction and storage temperature range	$T_j, T_{STG}$	-50 --- +150				$^\circ C$

**电特性** TA = 25°C 除非另有规定。

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	D3SB20	D3SB40	D3SB60	D3SB80	单位 Unit
最大正向电压 $I_F = 2.0A$ Maximum forward voltage	$V_F$	1.05				V
最大反向电流 $T_A = 25^\circ C$ Maximum reverse current	$I_R$	10				$\mu A$
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	$C_j$	40				pF

特性曲线 Characteristic Curves

