


塑封整流桥堆
反向电压 600V
正向电流 4.0 A

Plastic Bridge Rectifier
Reverse Voltage 600 V
Forward Current 4.0 A

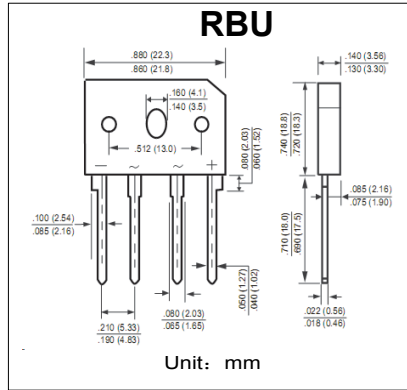

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力较强 High forward surge capability
- 浪涌承受能力: 130 A Surge overload rating: 130 Amperes peak
- 引线 and 管体皆符合RoHS标准。
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RBU405M	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	600	V
最大均方根电压 Maximum RMS voltage	V_{RMS}	420	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	4.0	A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	130	A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	22	°C/W
工作结温和存储温度 Operating junction and storage temperature range	T_j, T_{STG}	-55 --- +150	°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RBU405M	单位 Unit
最大正向电压 Maximum forward voltage	$I_F = 4.0A$ V_F	1.1	V
最大反向电流 Maximum reverse current	TA= 25°C TA= 100°C I_R	5 500	μA
典型结电容 VR = 4.0V, f = 1MHz Type junction capacitance	C_j	40	pF

特性曲线 Characteristic Curves

